

S 180

Hydraulic Rescue Equipment
for Emergency Use



Part no. 059.947.6

Cutter S 180

DIN, prEN, NFPA approved

Range of application: side-impact protection bars, door posts, roof panels, sills and quarter panels

Opening width: 185 mm
Weight: 13,9 kg
Cutting performance
with solid bar: Ø 30 mm

- **Optimal force** and opening for toughest operations
- **Excellent power to weight** ratio and balance
- **Curved blades** – clasp the material to be cut, whilst the serrations hold the material and improve cutting
- Re-sharpenable blades made of high quality quenched and tempered tool steel, with notch for cutting round bars
- Handle removable and adjustable through 360°
- Ergonomically designed for both left- and right-handed people
- **Unique WEBER-Control** for fine tuned precision handling

Minimum requirements for prEN: G classification:

Round bar: 26 mm
Square tube: 55 x 4 mm
Rectangular tube: 80 x 40 x 3,2 mm
Flat bar: 100 x 10 mm
Round tube: 72,3 x 3,2 mm

Accessories:

Order number for spare blades: 180.422.7





Cutter S 180

Teile-Nr. 059.947.6

Technical Data:

Operating pressure P_N 630/700 bar
 Test pressure P_P 910 bar
 Weight 13,9 kg
 (incl. 0,5 m Hoses & Couplings)

Control System in accordance with DIN 14751
 Temperature range from -30°C to $+80^\circ\text{C}$

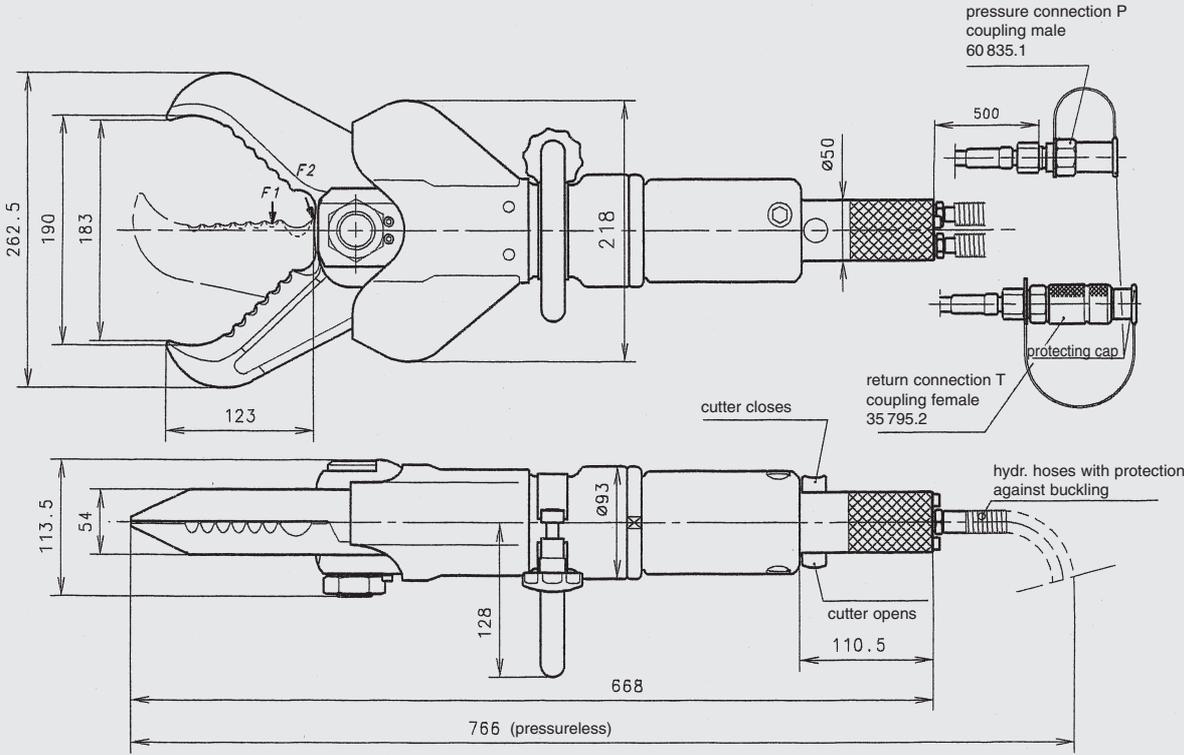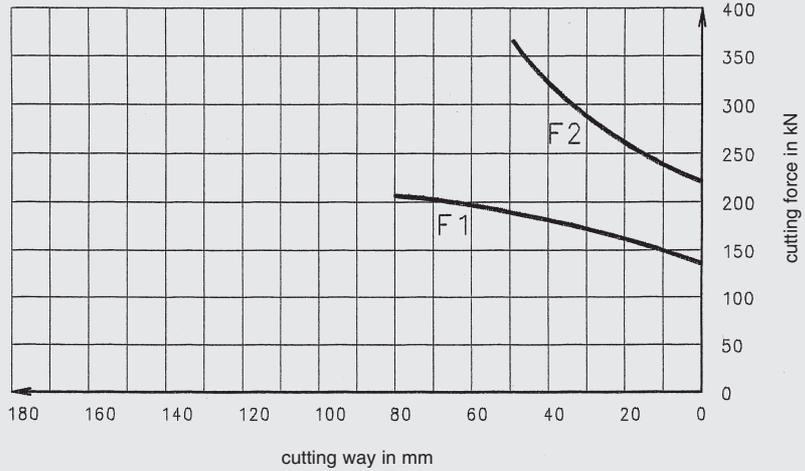

Your Partner for WEBER Rescue-Equipment:

